


PIN RIG FOR BILL FISH

A SWIMMING ONE

WHAT YOU NEED

- 10/0 Gamakatsu hook
- 1*1.2ml crimp
- 2*1.5ml crimp
- Trace, 120lb mono, approx 1150 long
- Single Strand Wire, 190lb, approx 100ml long
- Round Sinker, size 4 or 5, with a hole drilled into one of the openings. The hole should be big enough to conceal a double Granny Knot.

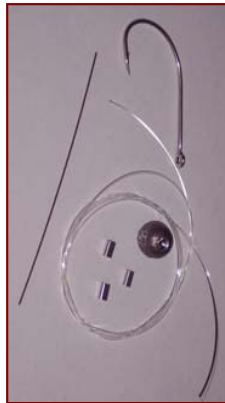

STEP ONE


- With the bigger crimp make a loop at one end of the trace.
- This will connect your terminal to your leader.

STEP TWO

- Bend Wire into U Shape
- Thread the two remaining crimps onto the trace

STEP THREE

- Thread wire and Mono through eye of Hook.
- Lay mono and wire side by side in the eye of the hook, not on top of each other

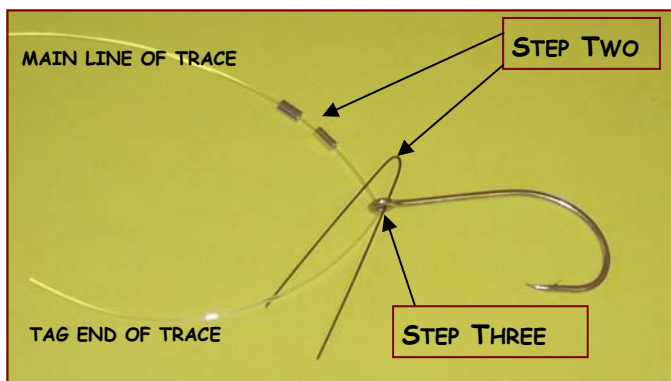

STEP FOUR

- Thread both mono and wire into crimp.
- Pull crimp up so that hook is firm. Not too tight as the hook needs to retain some flexibility.
- The wire should be on the outside ie. Inside the crimp the order should be wire/mono/mono/wire.
- Leave a tag of mono, approx 100ml
- When it's all lined up and straight secure crimp


STEP FIVE

- Slide the next crimp up and secure wire and the main line of your trace, leave the tag out. The tag will sit between the two crimps.
- Make sure the two crimps are close but not squashing mono.
- Bend both wires at right angles, check that everything is straight.

STEP SIX

- Thread sinker, the opposite end to what you drilled first, onto the 100ml tag. Tie a Granny Knot, firm the knot then slide down into the hole in the sinker

- Tie another Granny Knot and do the same again
- Cut tag off
- Melt knot into hole—use cigarette lighter or heat torch
- Optional—fill with glue. I use Pool Repair Clear Adhesive glue.

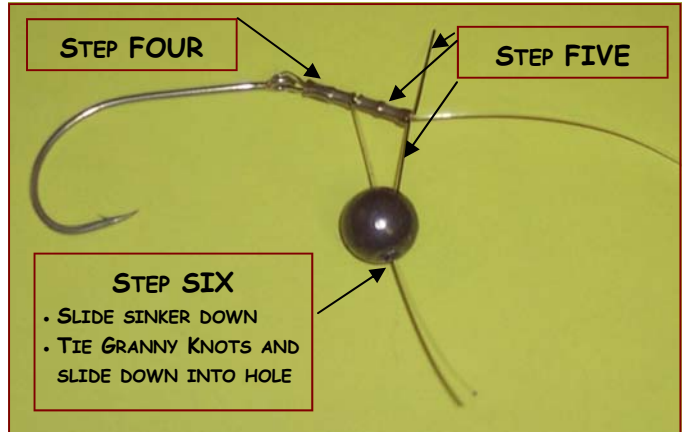

USE AS: SWIM BAIT
USE FOR: YAKKA
 MULLET
 GARFISH

USE ON FLAT LINE OR DOWNRIGGER

RIGGING

1. Flex the fish
2. Pull the eyes out
3. If using gar cut the beak off leaving about .5 cm
4. Insert hook into Gill Cavity and bring out on the centre line of the underbelly. Take care not to destroy the divider in the Gill Cavity
5. If the hook is tight make a slit in the belly behind the hook so the hook will sit
6. Spike wire dead centre between eyes and the beak
7. Secure with Rubber Band

Note: There is no set rule to making this Pin Rig. Some people thread the mono through the drilled sinker, tie the knot and pull down as step one. Do whichever works for you.



NOW IT'S READY TO GO!